



SpiralTrac™ Vertical Turbine Quote Form

Configuration

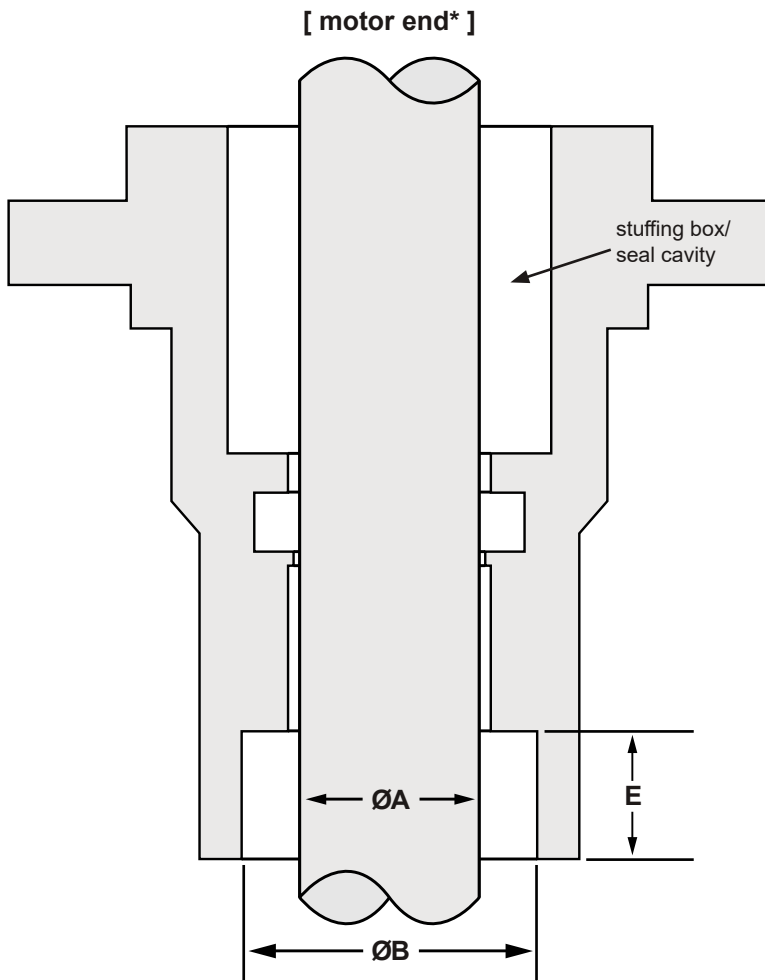

Can be used with Packing or Mechanical Seal!

*Shaft rotation as viewed from the motor end³:

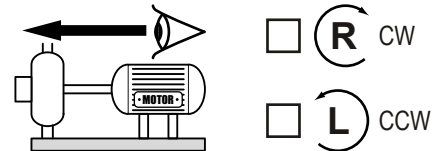

Measurements

Units of measurement: Inch Metric

ØA (Shaft OD): _____

Typically dictated by EnviroSeal:

ØB (Cavity ID): _____

E (Cavity depth): _____

Note:

1. Minimum cross section required is **0.312"**
2. Minimum axial length for SpiralTrac is **1.000"**
3. Vertical turbine shaft is typically left hand rotation
4. Make sure equipment is a vertical turbine, not a vertically mounted centrifugal pump

Material

- 316 Stainless Steel
- 416 Stainless Steel
- 17-4PH Stainless Steel
- BRZ (660 Bronze)
- Other: _____

Extra Information

Equipment

Make: _____

Model: _____

Size: _____

RPM: _____

Product: _____

Solids %: _____ Temperature: _____

Notes: _____

Distributor

Company: _____

Specialist: _____

P.O.#: _____

Customer: _____



2456 Rocky Lake Drive
Waverley, Nova Scotia, Canada
B2R 1R6

enviroseal.ca
info@enviroseal.ca
+1 (902) 861-3464

This document is available online at enviroseal.ca. EnviroSeal Terms & Conditions of Sale is available online at enviroseal.ca/terms_of_sale. The purchaser is responsible for ensuring the dimensions, quantity and applications suitability meet end user requirements. Please email filled out form to support@enviroseal.ca.

Patent Protected Worldwide. SpiralTrac is a trademark of EnviroSeal Engineering Products Ltd.